AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT	1. Contract Number	Page of Pages 1 | 1

2. Amendment/Modification Number	3. Effective Date	4. Requisition/Purchase Request No.	5. Solicitation Caption
DCFA-2008-R-0124-007	25-Mar-08		Evidence Control & Storage Facility

6. Issued By: Code	7. Administered By (If other than line 6)
Office of Conracting and Procurement Construction, Design and Building Renovation Group 441 4th Street NW, Suite700S Washington, DC 20001 Attn:Diane Wooden	

8. Name and Address of Contractor (No. Street, city, country, state and ZIP Code)		
	(X)	9A. Amendment of Solicitation No.
		DCFA-2008-R-0124
		9B. Dated (See Item 11) 2/22/2008
		10A. Modification of Contract/Order No.
		10B. Dated (See Item 13)
Code | Facility		

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

[x] The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers [ ] is extended. [X] is not extended.
Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods: (a) By completing Items 8 and 15, and returning 1 copies of the amendment: (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or fax which includes a reference to the solicitation and amendment number. FAILURE OF YOUR ACKNOWLEDGEMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by letter or fax, provided each letter or telegram makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. Accounting and Appropriation Data (If Required)

13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS,
IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14

(X)	A. This change order is issued pursuant to: (Specify Authority) The changes set forth in Item 14 are made in the contract/order no. in item 10A.
	B. The above numbered contract/order is modified to reflect the administrative changes (such as changes in paying office, appropriation date, etc.) set forth in item 14, pursuant to the authority of 27 DCMR, Chapter 36, Section 3601.2.
	C. This supplemental agreement is entered into pursuant to authority of: DCMR 27 2008.4 (a) (b) ©
	D. Other (Specify type of modification and authority)

E. IMPORTANT: Contractor [ ] is not, [x] is required to sign this document and return 1 copies to the issuing office.

14. Description of amendment/modification (Organized by UCF Section headings, including solicitation/contract subject matter where feasible.)

Solicitation No. DCFA-2008-R-0124 is hereby amended as follows:

Add the attached "Topographic Survey, St. Elizabeth Hospital East Campus " to Section J.1, Attachment U.

Except as provided herein, all terms and conditions of the document referenced in Item (9A or 10A) remain unchanged and in full force and effect

15A. Name and Title of Signer (Type or print)		16A. Name of Contracting Officer Karen M. Hester	
15B. Name of Contractor (Signature of person authorized to sign)	15C. Date Signed	16B. District of Columbia (Signature of Contracting Officer)	16C. Date Signed 3/25/08

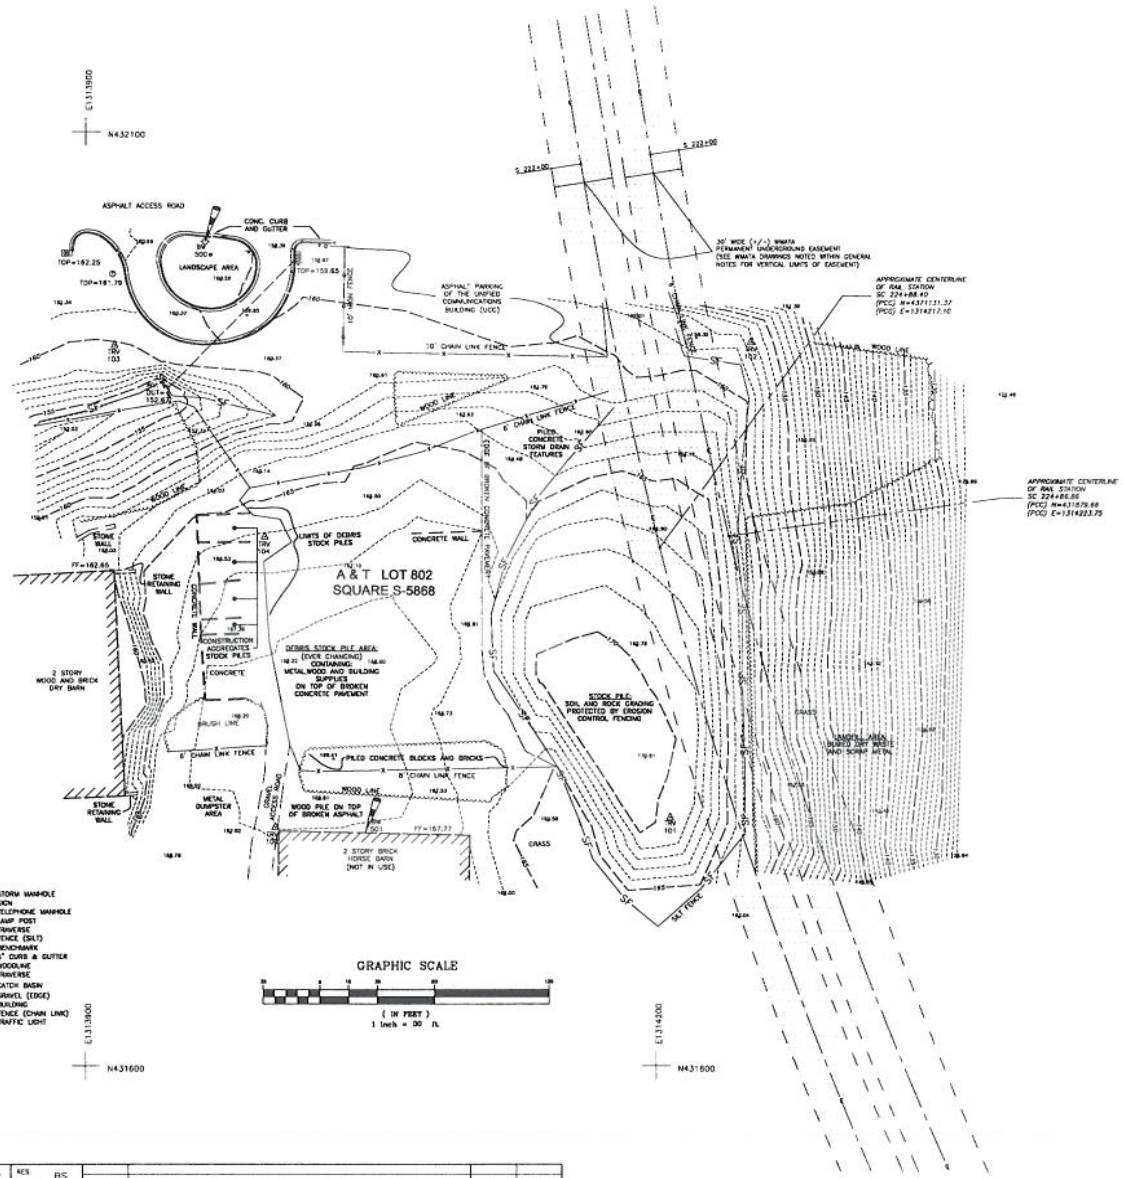

TRAVERSE DATA

TRAVERSE	NORTHING	EASTING	ELEVATION	DESCRIPTION
100	431727.5422	1314000.3075	167.85	REBAR AND CAP
101	431732.8995	1314207.7596	170.11	REBAR AND CAP
102	431987.7594	1314250.1546	160.51	REBAR AND CAP
103	431986.0078	1313915.3412	160.25	REBAR AND CAP
104	431883.3223	1313994.6220	165.96	REBAR AND CAP

BENCHMARK DATA

BM	ELEVATION	DESCRIPTION
500	162.75	"X" CUT ON BOLT OF FIRE HYDRANT (UCC BUILDING).
501	169.94	TOP OF BOLT ON HORSE BARN NORTH ENTRANCE

VERTICAL LIMIT OF WMATA EASEMENT

FROM STATION	TO STATION	UPPER LIMIT
222+00	224+50	72.00
224+50	227+00	75.00

*WMATA DATUM
*PER WMATA BRANCH ROUTE SHEET M933-18 & M933-19

GENERAL NOTES

1. HORIZONTAL DATUM: MARYLAND STATE PLANE NAD 83/91.
2. VERTICAL DATUM: DCDPW
3. UTILITIES: THE LOCATION OF THE UTILITIES SHOWN HEREON IS A COMBINATION OF FIELD INVESTIGATION, VISIBLE FIELD EVIDENCE, AVAILABLE RECORDS AND QUALITY LEVEL B UTILITY DESIGNATION. UTILITY LOCATIONS SHOWN ARE FOR DESIGN PURPOSES ONLY AND CANNOT BE GUARANTEED. THE CONTRACTOR/ENGINEERS SHOULD DIG TEST PITS BY HAND AT ALL UTILITY CROSSINGS TO VERIFY EXACT LOCATIONS.
4. THE SUBJECT SITE IS BEING USED AS A STOCK PILE YARD FOR SOILS, ROCK, AND DEBRIS. THE TOPOGRAPHIC DETAILS AND OR VOLUME OF WASTE PILES CAN'T BE DETERMINE BECAUSE OF THE EVER CHANGING NATURE OF IT'S SPECIFIC USE.
5. THE WMATA EASEMENT LOCATION SHOWN HEREON IS APPROXIMATE AND FOR DESIGN PURPOSES ONLY. THE WMATA EASEMENT IS SHOWN BASED ON: WMATA BRANCH ROUTE RIGHT-OF-WAY PLAN STA. 215+50 – 227+00 (DRAWING NO. FBA-R-3). STA. 227+00 – 238+50 (DRAWING NO. FBa-R-2).
6. ADDITIONAL INFORMATION LOCATED ON HIDDEN LAYERS AND FROZEN LAYERS.
7. CONTOUR INTERVAL IS ONE (1) FOOT.
8. PROPERTY: THE SUBJECT SITE IS LOCATED WITHIN THE ST. ELIZABETH HOSPITAL EAST CAMPUS. THE SUBJECT SITE IS LOCATED WITHIN DC ASSESSMENT AND TAXATION LOT 802 IN SQUARE S-5868

SURVEY CERTIFICATION:

I HEREBY CERTIFY TO THE BEST OF MY KNOWLEDGE AND BELIEF, THAT THE TOPOGRAPHIC SURVEY IS CORRECT, THAT THIS SURVEY WAS ESTABLISHED BY A TOTAL STATION FIELD SURVEY MARK ON THE GROUND, THAT THE SURVEY CORRECTLY SHOWS THE HORIZONTAL AND VERTICAL LOCATION OF VISIBLE, ABOVEGROUND IMPROVEMENTS SHOWN HEREON.

DANIEL R. SCHRIEVER — DATE
LICENSED SURVEYOR
DISTRICT OF COLUMBIA LICENSE NO. LS900589

LEGEND

STORM MANHOLE
SIGN
TELEPHONE MANHOLE
LAMP POST
TRAVERSE
FENCE (SILT)
BENCHMARK
6" CURB & GUTTER
WOODLINE
TRAVERSE
CATCH BASIN
GRAVEL (EDGE)
BUILDING
FENCE (CHAIN LINK)
TRAFFIC LIGHT

GRAPHIC SCALE
(IN FEET)
1 inch = 30 ft.

AMT
A. MORTON THOMAS AND ASSOCIATES, INC
CONSULTING ENGINEERS
12750 TRIMBLE PARKWAY · ROCKVILLE, MD 20852-1700
PH:(301)881-8949 FAX:(301)881-0814

RES.	BS			
SURV.	CA BH			
COMP.	CA			
DES.	AMT			
DRN.	CA			
CHK.	RB DRS	03/20/2008 SURVEY ISSUED	CA	DRS
		DATE REVISION	BY	APPR.

TOPOGRAPHIC SURVEY

METROPOLITAN POLICE DEPARTMENT
EVIDENCE CONTROL AND STORAGE FACILITY
ST. ELIZABETH HOSPITAL EAST CAMPUS
A & T LOT 802- SQUARE S-5868 — DISTRICT OF COLUMBIA

SCALE	CONTOUR INTERVAL	A.M.T. FILE No.
1in.=30 feet	1 FOOT	108.101.001S
DATE	TAX MAP No.	SHEET
MARCH 2008	N/A	1